



**PLASTICS
ENGINEERED BY**

GEHR



CONTENT

- » Our Company
- » GEHR POM-C® - Calendered Sheets
- » ECO-GEHR POM-C R®
- » GEHR PET®
- » GEHR PPA®
- » MEDI-GEHR PET MG®
- » MEDI-GEHR PC MG®
- » FIL-A-GEHR PC®
- » FIL-A-GEHR PA 12 – CF15®
- » Contact

» FAMILY OWNED AND OPERATED COMPANY WITH TRADITION



» GEHR – AN INTERNATIONAL COMPANY

» US headquarters and production site
Philadelphia, PA, USA



» World headquarters and production site
Mannheim, Germany



» Asia headquarters and warehouse
Hong Kong

QUALITY AND INNOVATION



MARKET SEGMENTS





» GEHR EXPERTISE

EXTRUDED RODS, SHEETS, TUBES, PROFILES AND FILAMENTS

SPECIALTIES:

- » Rods up to 700 mm diameter
- » Thick plates up to 300 mm thickness
- » Decorative precision tubes
- » Semi-finished products for medical applications
- » Filaments for professional 3D printing

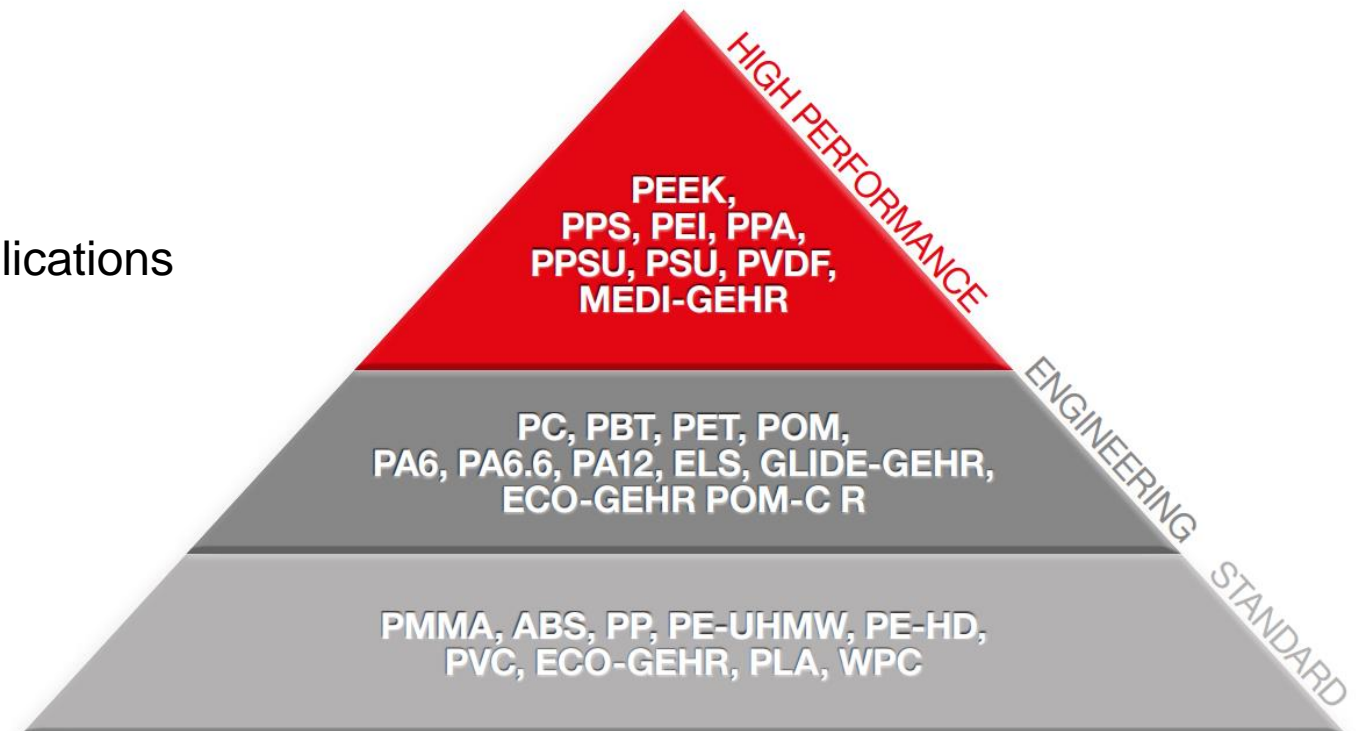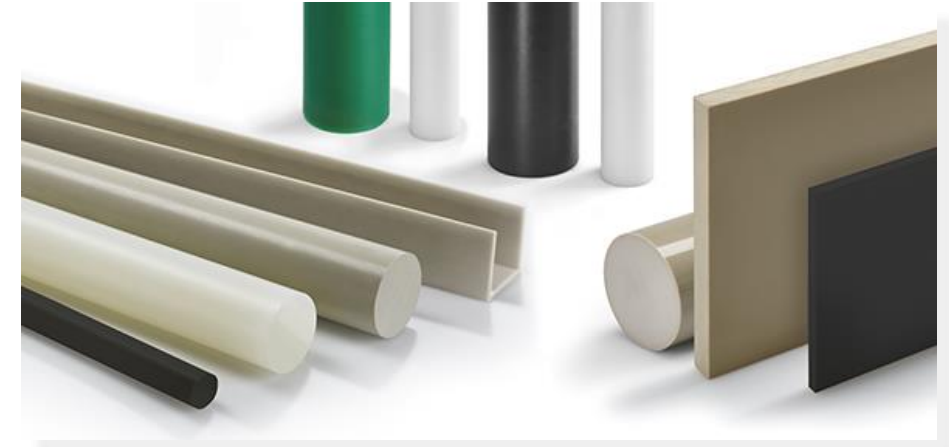

ENVIRONMENTAL PROTECTION AND SUSTAINABILITY

SUSTAINABLE PRODUCT RANGE

ECO-GEHR® and FIL-A-GEHR

Greenpoint and Pointball product development: pen made from 79% recycled plastic

CO₂-NEUTRAL PRODUCTION

- Conversion to green electricity and green gas in Mannheim and Philadelphia.
- Achievement of the implementation packages of Katowice Scope1 and Katowice Scope1 and 2

SINCE 2016: 100% RENEWABLE ELECTRICITY

Since 2016, total electricity requirements covered by renewable energies - mainly from hydropower in Norway.



» ENVIRONMENTAL PROTECTION AND SUSTAINABILITY

COOLING PROCESS OPTIMIZED

In order to sustainably conserve water as a resource, we have also made mechanical adjustments to our plants. This has enabled us to significantly reduce the amount of water required in the cooling system as well as the supply of fresh water.

RECYCLING CONCEPT FOR THE AVOIDANCE OF PRODUCTION WASTE

The returned material is sorted, ground, recycled and reused in production wherever possible and permitted.

1.PRIZE: ENVIRONMENTAL AWARD FROM THE CITY OF MANNHEIM 2014

Award for "exemplary performance in corporate environmental protection".



» MOBILITY OF THE FUTURE


In collaboration with TU Munich and Evonik, we are ensuring that the Hyperloop project moves into the next phase. Hyperloop is a new concept for transporting goods and people at almost the speed of sound. The train travels like a maglev train in a low-pressure tube above the earth's surface. In this team, we produced sheets made of VESTAMID® (PA12 filled with glass fibers) for a 24-m-long test track. After extrusion, these sheets are machined before installation to hold the magnetic coils in position for the train.





Thermoplastic semi-finished products

STOCK SHAPES

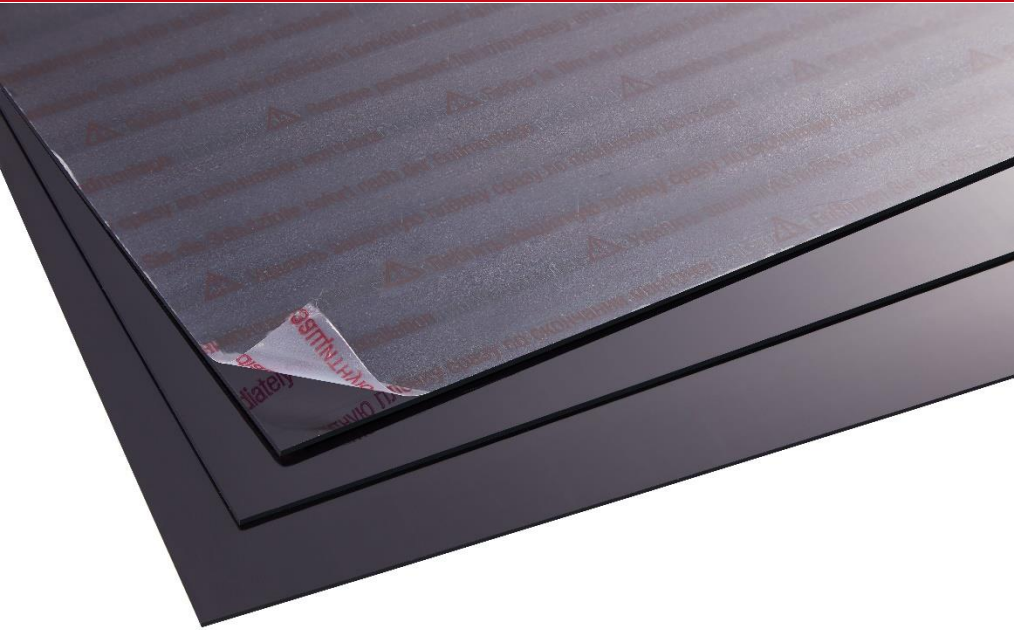

» GEHR POM-C® Calendered Sheets

- » Pressure resistant quality
- » High hardness and stiffness
- » High toughness (down to -40 °C)
- » High heat resistance
- » Low water absorption
- » High dimensional stability
- » Good electrical isolation behavior
- » Very good sliding friction and sliding wear behavior
- » High resistance to solvents
- » High resistance to stress cracking

PRODUCT RANGE:

- » Colours: black and natural
- » Sheets from **1 mm** to 8 mm (length: 2 m; width: 1000 mm)
- » Custom production on request
- » Other dimensions can be produced to customer order

» ECO-GEHR POM-C R®

- » **ECO-GEHR POM-C R®** is made from 100% recycled POM-C.
- » The remaining properties can be considered as equivalent to virgin POM-C

- » Enormous Surface Hardness
- » Very Good Sliding-friction Properties
- » High Chemical Resistance
- » Long-term Service Temperature 100°C
- » Limited UV-Resistance

PRODUCT RANGE:

- » Colours: black
- » Rods and sheets
- » Custom production on request.

Das Kunststoff-Zentrum

SKZ

Carbon Footprint

This document confirms that on behalf of



GEHR Kunststoffwerk GmbH & Co. KG
Casterfeldstr. 172
68219 Mannheim

the Carbon Footprint¹ (CF) has been determined for the following products

Full rods from recyclate from 100 % recycled POM	Full rods from virgin material from 100 % virgin POM
1,29 kg CO ₂ -eq.	4,61 kg CO ₂ -eq.

relating to 1 kg of the respective product.

Using 1 kg *Full rods from recycled POM* instead of 1 kg similar virgin *Full rods* reduces greenhouse gas emissions by about 3,33 kg CO₂-eq.

Würzburg, 11.10.2022

Antonia Ivanda

Antonia Ivanda M.Sc.
SKZ – Das Kunststoff-Zentrum

¹ The Carbon footprint was calculated using established, science-based methods. The calculation was conducted based on the international LCA standards DIN EN ISO 14040, DIN EN ISO 14044 and the standard DIN EN ISO 14067 "Carbon footprint of products". The comparison is subject to limitations.

GEHR PET®



- » High strength and stiffness
- » High creep resistance
- » High surface hardness
- » Good polishability
- » High dimensional stability
- » Good sliding friction properties and abrasion resistance
- » Good electrical isolation properties
- » High chemical resistance
- » Good coatability
- » Medium dielectric properties
- » Sensitive to hydrolysis

PRODUCT RANGE:

- » Colours: black and **natural (snow white)**
- » Sheets: 10, 16, 20, 30, 40, 50 und 60 mm (length: 1-3 m; width: 620 mm)
- » Rods from 20 to 100 mm diameter (length: 1-3 m)
- » Calendered sheets from 2 mm to 8 mm
- » Custom production on request
- » Other dimensions can be produced to customer order



GEHR PPA®

- » Continuous service temperature from -40°C to +160°C
- » Very low water and moisture absorption
- » Excellent mechanical properties up to 125°C
- » Very high chemical resistance
- » Low wear and abrasion at higher temperatures
- » Very high toughness and dimensional stability
- » Constant coefficient of expansion (up to 100 °C)
- » Bursting pressure at 130°C (1.5mm wall thickness): 105 bar

- » Melting point (DSC): 280°C
- » Glass transition temperature: 125°C
- » Tensile Modulus: 2500 MPa

APPLICATIONS:

- » Transportation industry
- » Automotive industry
- » Thermostat housing and kitchen appliances



PROTECT-GEHR®

- » Development of a dental prosthesis with an antibacterial effect
- » The aim was to develop an inorganic antibiotic metal in order to then use it in semi-finished products. These semi-finished products can then be processed into dental products.
- » Patented solution
- » Can be added to all our products (Rods, Sheets, Filaments, etc.)
- » Designation of these new product range is:






PROTECT-GEHR

PROTECT-FIL-A-GEHR



Thermoplastic semi-finished products

MEDICAL TECHNOLOGY

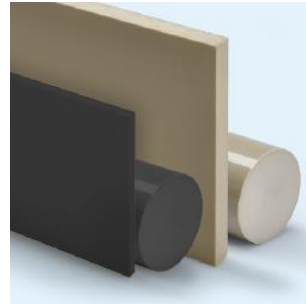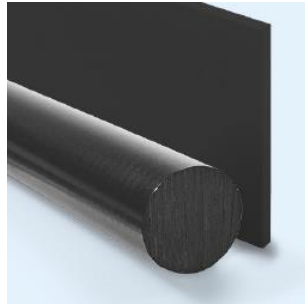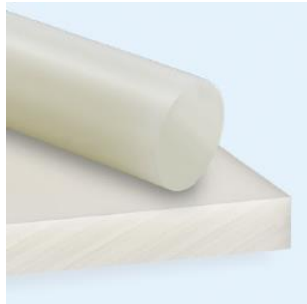



» **MEDI-GEHR PET MG®**

- » Very good chemical resistance
- » Very high impact strength
- » High surface hardness
- » High hydrolysis resistance
- » High creep resistance
- » Good polishability
- » Good sliding friction properties and abrasion resistance
- » Good electrical insulation properties
- » High resistance to gamma radiation

APPLICATIONS:

- » Operating room lights
- » Housings
- » Medical components
- » Disposables for biomedical applications

» **MEDI-GEHR PC MG[®]**

- » Continuous service temperature from -60°C to +120°C
- » Very high stiffness
- » Very high impact strength
- » Very high dimensional stability
- » Resistance to x-ray irradiation
- » Very good heat deflection temperature (approx. 135°C)
- » High surface hardness

APPLICATIONS:

- » Surgical lights
- » Dialysis machines
- » Incubators
- » Oxygen equipment
- » Inhalers



» **MEDI-FIL-A-GEHR®**



MEDI-FIL-A-GEHR products are suitable for medical and pharmaceutical applications with direct body contact with tissue, bone, skin and mucosa for up to 24 hours. All materials meet the same requirements as the semi-finished products. Especially for our certificates and approvals:

FDA*, EU 10/2011*, ISO 10993-1, -5, -12, -18 and USP Class VI

	MEDI-GEHR PEEK MG®	MEDI-GEHR PPSU MG®	MEDI-GEHR PET MG®
	Ø 1,75 mm	Ø 1,75 mm	Ø 2,85 mm Ø 1,75 mm
kg			
0,1	●	●	
0,2	●	●	
0,5	●	●	○ ○
1	●	●	○ ○

● natur / natural
○ transparent

○ weiß / white
● schwarz / black

■ Auf Lager / Stock item

* only for raw material



FIL-A-GEHR[®]

PLASTICS
ENGINEERED BY **GEHR** [®]



» FIL-A-GEHR PC®

FIL-A-GEHR PC® is a filament with a very good heat deflection temperature. The combination of very high stiffness and dimensional stability makes it perfect for 3D printing.

- » Continuous service temperature from -60°C to +120°C
- » Very high stiffness
- » Very high impact strength
- » Very high dimensional stability
- » Resistance to x-ray irradiation
- » Very good heat deflection temperature (approx. 135°C)
- » High surface hardness

APPLICATIONS:

- » Construction components
- » Transportation

PRODUCT RANGE:

- » Colour: Colourless
- » Diameter: 1,75 mm and 2,85 mm
- » 1 kg Spools



» FIL-A-GEHR PA 12 – CF15®

FIL-A-GEHR PA 12 – CF15® is a filament strengthened by carbon fiber (15%), which has a very high mechanical strength with low water absorption.

- » Low water absorption
- » Very high stiffness and impact strength
- » Good chemical resistance
- » Good abrasion and sliding properties
- » High resistance to weathering
- » Pressure nozzle temperature 250-260°C
- » Printing plate temperature 100°C

APPLICATIONS:

- » Construction components
- » Transportation

PRODUCT RANGE:

- » Colour: Black
- » Diameter: 1,75 mm and 2,85 mm
- » 500 g and 1 kg Spools



CONTACT



 **Mr. Achim Hodapp**
Sales Manager D/A/CH



 **Mr. Dirk Nüssgen**
Senior International Sales Manager



 **Mr. Dr. Sebastian Anders**
Business Development Manager

GEHR GmbH

Casterfeldstraße 172, 68219 Mannheim, Germany
Tel.: +49 621 8789 - 0, info@gehr.de, www.gehr.de